


L-864 LED

Red Beacon Medium Intensity

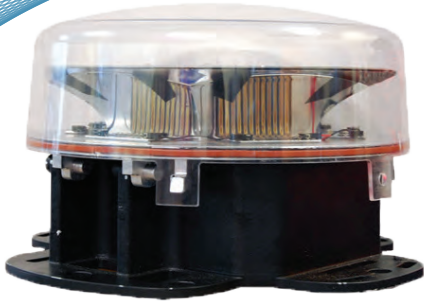

COMPLIANCES

FAA AC 150/5345-43F
 FAA Engineering Brief No. 67
 ICAO (Annex 14 - Fourth Edition, July 2004)
 ICAO Aerodromes Design Manual, Chapter 18
 ETL Certified



AVIATION/OBSTRUCTION LIGHTS - 9.5

FEATURES

- Certified to FAA AC 150/5345-43F.
- Compliant to ICAO (Annex 14 - Fourth Edition, July 2004).
- Over 90% more efficient than an incandescent.
- Steady Burn or Flashes (20-40fpm) when paired with a controller.
- Resistant to shock and vibration.
- FCC Testing EMC #47CFR, Part 15; 2008; Class A.

PRODUCT APPLICATION

The D464 Series LED based medium intensity red beacon utilizes state-of-the-art optical design to achieve the most compact, efficient, FAA compliant L-864 device in the market. While it readily interfaces into existing installations, its robust, low power design will provide years of maintenance-free service.

SPECIFICATIONS



Supply Voltage	120-240VAC, 50/60Hz; Universal Input
Power Consumption	20W
Operating Temp	-40 °F to +131 °F (-40 °C to +55 °C)
Power Factor	>0.9

ORDERING INFORMATION

Description	Part Number	VAC
Beacon, Red	D464-A13-001	120/240VAC
Beacon, Red (ICAO)	D464-A13-001EU	120/240VAC

Note: This product is also available in a GPS controlled version. Call for more information. Manufactured by Unimar Lighting & Control Solutions

MECHANICAL DIMENSIONS

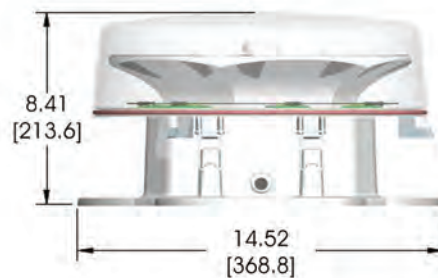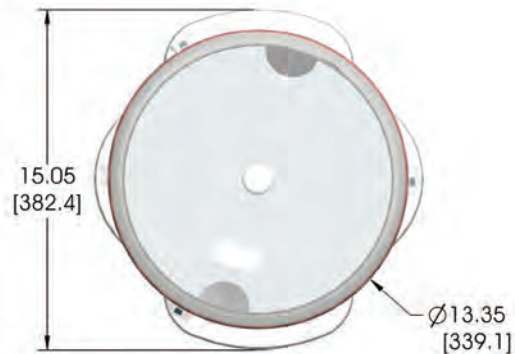

6830 NW 16th Terrace • Ft. Lauderdale, FL 33309 USA
 Phone: 1.937.652.3500 • E-mail: AFLsales@HugheyAndPhillips.com
 www.HugheyAndPhillips.com



Actual product specifications may have changed since the printing of this brochure. Brochure specifications are not binding. Confirm current specifications at time of order.